

# X56 INTERCHANGEABLE



High performance LED modules compatible with a variety of sleek trim designs that are sold separately to optimize inventory allocation. The perfect combination of performance and customization.

## Performance

- The X56 series includes LED modules in three color temperatures (2700K, 3000K and 4000K) and 26 choices of corresponding trim packages (X5 for 5" cans and X6 for 6" cans)
- Dimmable with most standard incandescent (triac) and low voltage magnetic (MLV) dimmers for 10-100% light control
- Long life LEDs last up to 35,000 hours, 23 times longer than incandescent lamps rated at 1,500 hours
- Energy Star compliant and c/ETL/us Listed for wet locations

## Construction

- Acrylic lens diffuses LED light and has no exposed fasteners
- Aluminum heat sink fins keep LEDs cool
- Affixed steel torsion clips and springs secure assembly flush with ceiling
- Spun aluminum baffles and multipliers attach without tools

## Installation



- Fits most 6" cans (field adjustable to fit most 5" cans), 5-1/4" minimum clearance needed inside can
- Torsion clips available for cans without 'bullhorns'



## Photometrics

### X56-E26-30

Luminous flux	710Lm
Maximum intensity	311 cd
Input wattage	9.7W
Lumens per watt	73 LPW
Beam angle	93.8°

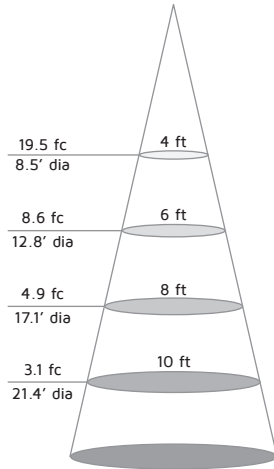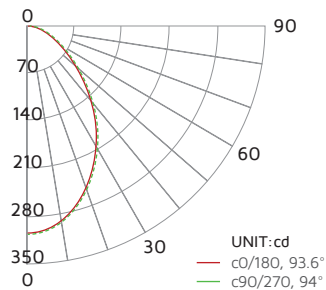

## Specifications

Series	X56
Input voltage	120V AC, 60Hz
Color temperature	2700K / 3000K / 4000K
Module Lumens	648 / 702 / 741
CRI	82+
Wattage	9.5W / 9.5W / 9.8W
Beam angle	93.8°
Dimming	Triac or MLV dimmers
Housing	Aluminum
Lens	Acrylic
Rating	c/ETL/us Listed for wet locations
Dimensions	6-1/2" Dia. x 5-1/4"H (X5 + X56) 7-1/2" Dia. x 5-1/4"H (X6 + X56)
Mounting	Recessed
LED type	27 x SMD 2323 LEDs
Rated life	35,000 hrs

## X56 Interchangeable Accessories



### AL-GU24


GU24 adaptor, required for Title 24 compliance



### X6-TORCLIPS (pair)


Torsion mounting brackets for 6" non-bullhorn housings

X56 Light Modules

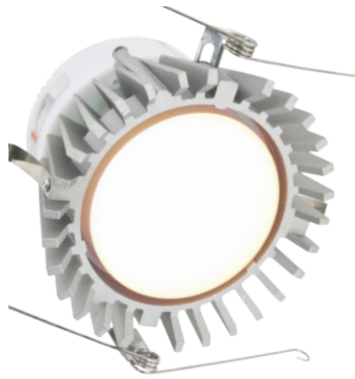


**X56-E26-27**

Ultra Warm White (2700K)  
9.5W / 648Lm

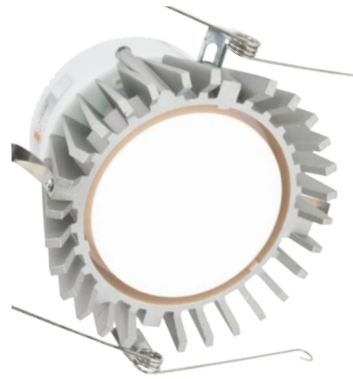

**X56-E26-30**

Warm White (3000K)  
9.5W / 702Lm

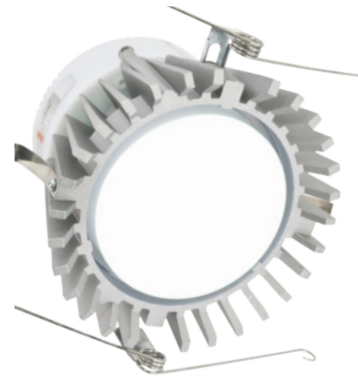

**X56-E26-40**

Bright White (4000K)  
9.8W / 741Lm

X56 Trim Packages - X5 for 5" cans, X6 for 6" cans



**X5-WHM-WH-X56**  
**X6-WHM-WH-X56**

White Multiplier  
White Trim  
X5 - 613Lm  
X6 - 632Lm



**X5-WHB-WH-X56**  
**X6-WHB-WH-X56**

White Baffle  
White Trim  
X5 - 601Lm  
X6 - 626Lm



**X5-BKM-WH-X56**  
**X6-BKM-WH-X56**

Black Multiplier  
White Trim  
X5 - 510Lm  
X6 - 531Lm



**X5-BKB-WH-X56**  
**X6-BKB-WH-X56**

Black Baffle  
White Trim  
X5 - 422Lm  
X6 - 435Lm



**X5-WHM-AL-X56**  
**X6-WHM-AL-X56**

White Multiplier  
Aluminum Trim  
X5 - 613Lm  
X6 - 632Lm



**X5-WHB-AL-X56**  
**X6-WHB-AL-X56**

White Baffle  
Aluminum Trim  
X5 - 601Lm  
X6 - 626Lm



**X5-ALB-AL-X56**  
**X6-ALB-AL-X56**

Aluminum Baffle  
Aluminum Trim  
X5 - 576Lm  
X6 - 594Lm



**X5-BKM-AL-X56**  
**X6-BKM-AL-X56**

Black Multiplier  
Aluminum Trim  
X5 - 510Lm  
X6 - 531Lm



**X5-BKB-AL-X56**  
**X6-BKB-AL-X56**

Black Baffle  
Aluminum Trim  
X5 - 422Lm  
X6 - 435Lm



**X5-SPM-DB-X56**  
**X6-SPM-DB-X56**

Satin Pearl Multiplier  
Dark Bronze Trim  
X5 - 596Lm  
X6 - 612Lm



**X5-DBB-DB-X56**  
**X6-DBB-DB-X56**

Dark Bronze Baffle  
Dark Bronze Trim  
X5 - 572Lm  
X6 - 590Lm



**X5-BKB-DB-X56**  
**X6-BKB-DB-X56**

Black Baffle  
Dark Bronze Trim  
X5 - 422Lm  
X6 - 435Lm